


Portable

Haier

2.5 kW

3.5 kW

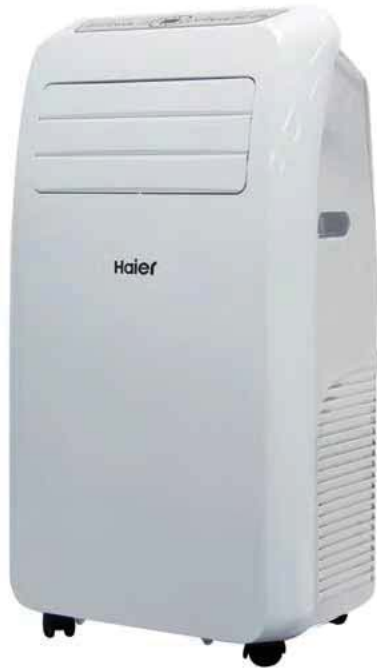

PORTABLE		Model	AM09AA1TAA	AM09AA1GAA	AM12AA1TAA	AM12AA1GAA
Performance data						
Power output	Cooling	Btu/h	9000	9000	12000	12000
		kW	2,6	2,6	3,5	3,5
Power output	Heating	Btu/h	-	9895	-	11260
		kW	-	2,9	-	3,3
Power Supply		Ph/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
Power consumption	RAFF.	kW	1,05	1,05	1,37	1,37
Power consumption	RISC.	kW	-	1,0	-	1,35
Current consumption	RAFF.	A	4,8	4,8	5,9	5,9
Energy Class	EER		2,61 (A)	2,61 (A)	2,61 (A)	2,61 (A)
	COP		-	2,8		2,75 (A)
Dehumidification		L/h	0,9	0,9	1,2	1,2
Treated air volume		m ³ /h	350	350	350	350
Noise level	H / M / L	dB(A)	56/54/52	56/54/52	56/54/52	56/54/52
Dimensions (WxDxH)	WxDxH	mm	443x340x815	443x340x815	443x340x815	443x340x815
Weight		kg	25	25	28	28
Refrigerant			R290	R290	R290	R290
Carica refrigerante in fabbrica		kg	0,235	0,235	0,245	0,245
Equivalent tonnes of CO ²		tCO ₂ EQ	0,70	0,70	0,73	0,73